




### FADINI ASTRO 43 2

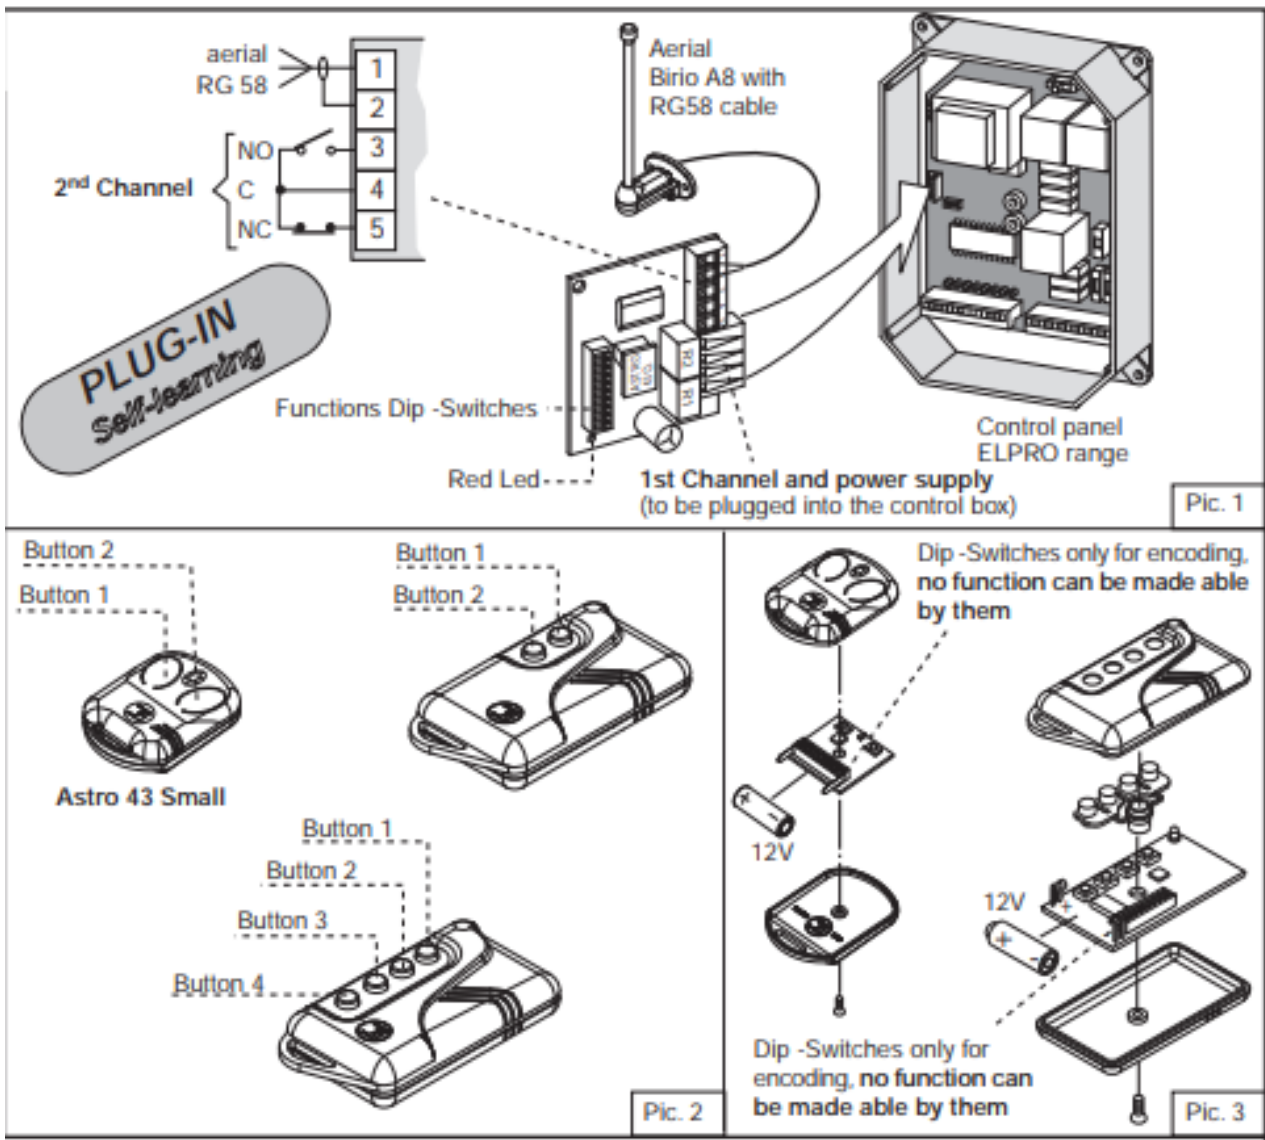

Memorizing one radio channel: Dip-Switch 5= ON (procedure to memorize the single transmitter buttons in the receiver): - Transmitter:

1. Open the casing and set the user's code by means of the internal Dip-Switches (Pic.3), record it down to prevent forgetting it, and re-assemble the unit.
2. Set to ON one of the Dip-Switches 1 and 2 in the receiver corresponding to the channel to memorize: the channel 1 is activated by plugging the receiver in the connector, the channel 2 is by connecting the terminals (Pic.1)
3. Press and hold a transmitter button (Pic.2), the receiver learns the signal and the red led flashes to confirm memorizing: each pulse with the transmitter emits a signal that closes the output relay contact of the channel memorized in the radio receiver.

- Important: once this operation is finished set all the Dip-switches on to OFF. The receiver led flashes 5 times to confirm

In order to match all the radio channels with the respective transmitter buttons by a single operation (button 1 with channel 1 and button 2 with channel 2) set the Dip-Switches 1, 2, 3, 4 and 5 = ON, carry on the memorizing operation as before, by pressing and holding any one button of the transmitter until the led flashes 1 time.

Once the operation is finished set all the Dip-switches on to OFF. The receiver led flashes 5 times to confirm