




ALLO
REMOTECONTROL

INSTRUCTIONS

GENIUS JA334/ JA332

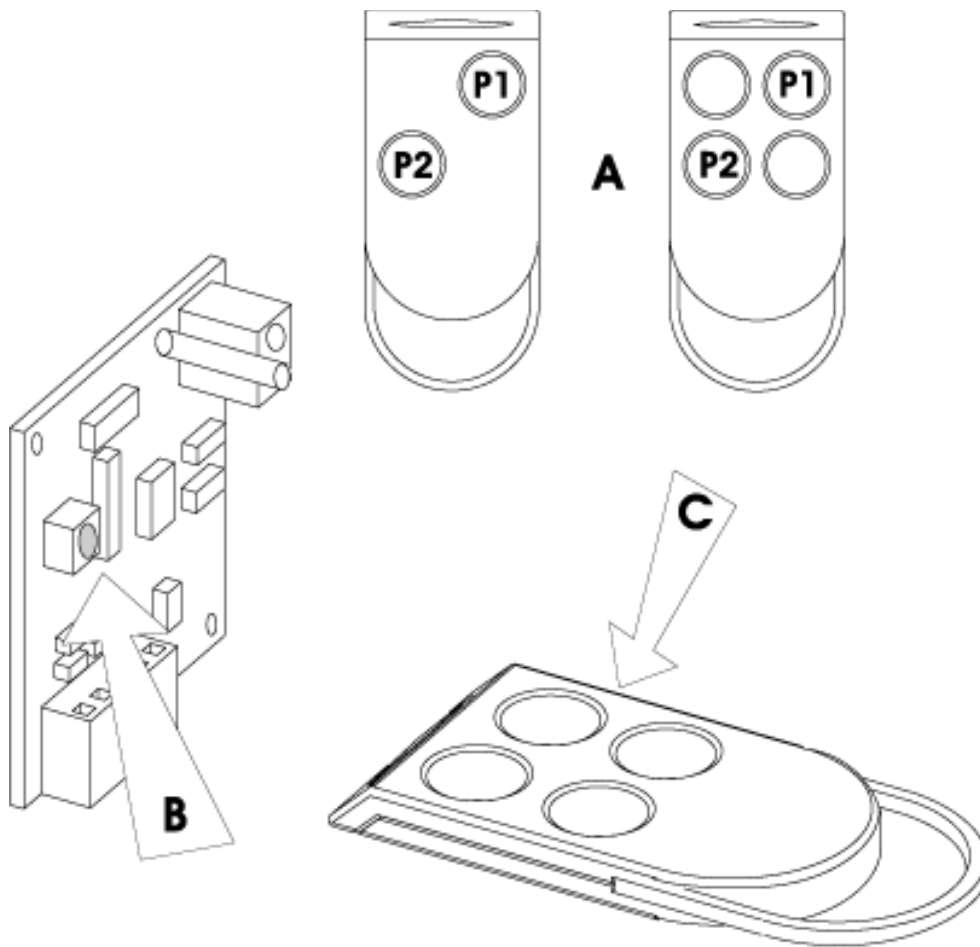

Visit our website: www.Alloremotecontrol.com

Programming a Master Remote to the Control Board:

1. Simultaneously press push-buttons P1 and P2 of the Remote and release them when the LED flashes (after about one second)
2. Press and hold down the learning button on the control panel receiver, the LED must flash – Keep button pressed. Do not release.
3. Press and hold down button P1 (on the remote: the transmitter's LED now goes on with a steady light – also keep this button pressed until step 4 is complete.
4. Check that the control panel receiver LED changes to a steady light for a couple of seconds to confirm that the “system code” was saved. You can now release the button.
5. Release the button of the remote. This remote is now the “Master remote”

Programming a Remote from the Existing Master Remote:

1. Simultaneously press buttons P1 and P2 of the Master Remote and release them when the LED flashes (after about one second);
2. Now bring into contact (touching) the master remote and the remote to be programmed
3. On the master remote press and keep held down the same button that was used to create the master remote: the LED will go on with a steady light (TIP, if the master remote coding instructions were followed then the button will be P1)
4. Press the required button on the remote to be coded (fig.6 ref.D) and release it when the LED goes off after flashing twice to confirm code has been copied.
5. Release the button of the Master remote.
6. Repeat this procedure using the master remote for every remote to be coded.