




CAME RBI2 RECEIVER

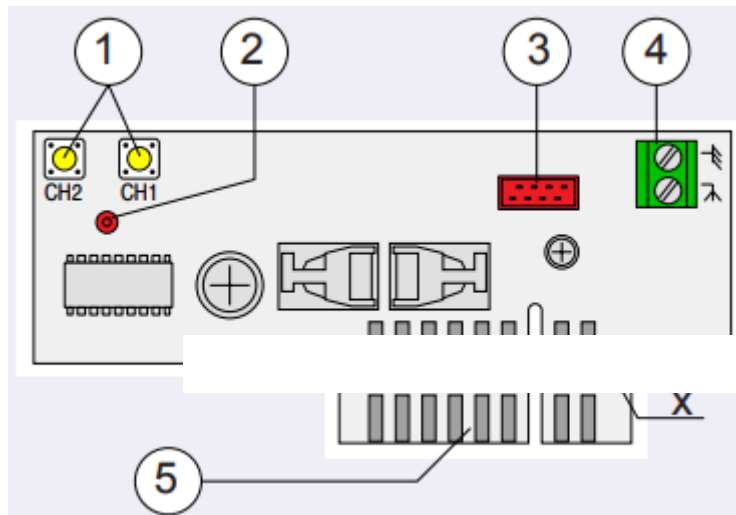

Caution! Before doing any connection or disconnection work on the board, the system must be disconnected from the power supply.

- A. insert an AF card (see table on opposite page) to socket 3
- B. using edge connector 5 (see also NOTE above), fit RBI encoder card in its housing on the master card and connect antenna to terminal 4
- C. encode transmitter/s
- D. store code in the RBI card