
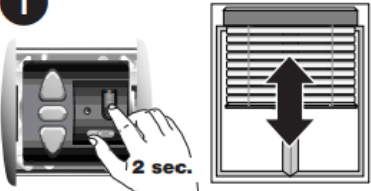
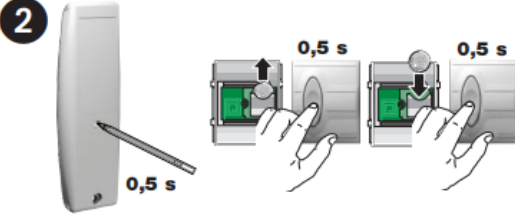




SOMFY CENTRALIS UNO

<p>1</p>  <p>Set the CENTRALIS uno RTS VB in its programming mode by pressing the PROG button until the blind jogs briefly (UP/DOWN).</p> <p>The CENTRALIS uno RTS VB will remain ready to record a control for two minutes.</p>	<p>2</p>  <p>RTS control Press briefly the programming button on the RTS control you wish to record.</p> <p>RT control Remove the battery, press briefly the button, replace the battery and press again briefly the button.</p>	 <p>→ The blind jogs briefly (UP/DOWN) and the LED of the CENTRALIS uno RTS VB blinks during 5 secs. indicating that the control has been recorded.</p> <p>CENTRALIS uno RTS VB quits its programming mode.</p>
--	---	--

GROUP CONTROL (one transmitter for several receivers)

To program one control in several CENTRALIS uno RTS VB, set all the receivers in their programming mode then repeat the same procedure

Record new controls:

You can program up to 12 controls to one receiver. If you try to enter a 13th, your instruction will be ignored

You can also use an already recorded control to set the CENTRALIS uno RTS VB in its programming mode RTS control :

press for more than 2 sec. on the "prog" button. RT control : remove the battery, press briefly the button, replace the battery and press for more than 2 sec. on the button.

→ The LED of the CENTRALIS uno RTS VB lights on and the blind jogs briefly UP and DOWN indicating that the CENTRALIS uno RTS VB is in programming mode and that you can record a new control.

Remove a control (on an existing installation)

Press the prog button of the CENTRALIS uno RTS VB to enter in programming mode, then press shortly the prog button of the RTS control you wish to remove.

It is also possible to set the CENTRALIS uno RTS VB in its programming mode with another RTS control (see 3.2), then press shortly the prog button of the RTS control you wish to remove.

To remove all the controls, do a complete reset of the CENTRALIS uno RTS VB

Visit our website: www.Alloremotecontrol.com